

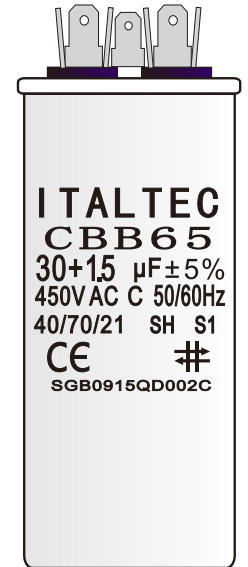


Product Specification(CBB65) - CAPACITOR REFRIGERACIÓN

Nro	Specified capacity and capacity deviation	Specified voltage and frequency	Over sll dimension (MM) ($\phi(L \times B \times H) \pm 1$)	Uriarte Reference Code	seal	Finished product extraction MM
1	25+1.5UF	450V	50*100	REF-CAP-0021	Outer roll edge seal	4+4+4
2	30+1.5UF	450V	50*100	REF-CAP-0022	Outer roll edge seal	4+4+4
3	30+2.5UF	450V	50*115	REF-CAP-0023	Outer roll edge seal	4+4+4
4	35+2.5UF	450V	50*115	REF-CAP-0024	Outer roll edge seal	4+4+4
5	35+4UF	450V	50*115	REF-CAP-0025	Outer roll edge seal	4+4+4
6	40+5UF	450V	50*125	REF-CAP-0026	Outer roll edge seal	4+4+4
7	45+5UF	450V	50*125	REF-CAP-0027	Outer roll edge seal	4+4+4
8	50+4UF	450V	55*125	REF-CAP-0028	Outer roll edge seal	4+4+4
9	50+6UF	450V	55*125	REF-CAP-0029	Outer roll edge seal	4+4+4
10	60+6UF	450V	55*125	REF-CAP-0030	Outer roll edge seal	4+4+4
11	60+8UF	450V	55*125	REF-CAP-0031	Outer roll edge seal	4+4+4
12						
Carry out standard	GB3667.1-2016 (IEC 60252.1 : 2013)					
Insulation resistance	T-T \geq 3000M Ω / μ F					
	T-C \geq 1000M Ω (20°C, 1min)					
loss angle tangent	\leq 0.0020 (100Hz)					
Withstanding standard	Between terminals	2.0UN 2S No Breakdown and Flying Arc Phenomena				
	Terminals to case	2500VAC IS No Lightning Phenomenon				
Operating temp range	25/85/21 50/60Hz	Life grade			C Class	
Extraction structure	horse flap	External size			Refer to the table	
Filling	Industrial paraffin	Capacitor core			Have self-healing	
Shell material	Aluminum shell	Packaging method			Common eggshell	
		Approval				

ITAltec

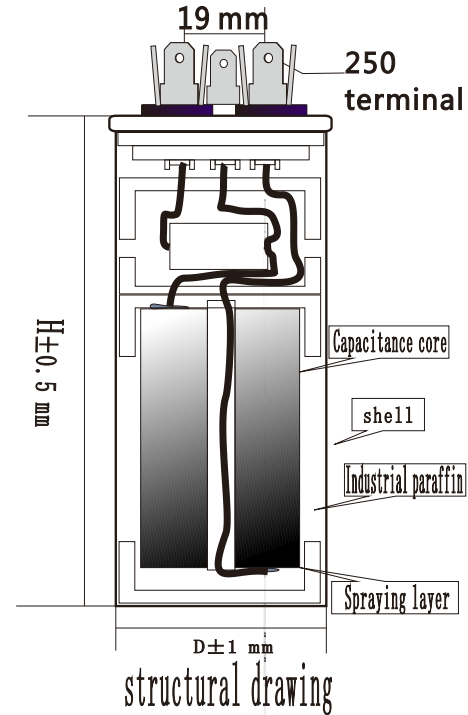

Appearance

SG-035